

CONTAINER AWNING



Product Description

The container awning is made to secure your cargo and save the people from falling goods when opening the container doors. It is also an alternative to container netting.

This container awning is designed for lighter goods and when ever loose cartons are loaded into the container.

The system consists of four 25mm strapping belts of 3,5 meter with an attached hook on one end and a 2,3 x 2,3 meter PP woven sheet with four attached clamp locks, one on each corner.

The four belts are made from our G85 strapping with a linear strength of 1000 daN, which is strong enough to hold the first rows of cartons safely back in the container. The final cross lashing make this system far stronger than most container netting systems.

Key Features

- Secures cargo
- Protects people from falling goods when unloading

Product Guidelines

1. Easy hooking of the 4 vertical straps into the existing container attachment points.
2. Put the straps into position to the container door.
3. Fully load the container.
4. Fix and pre-tension the cover by inserting the 4 straps into the sewed on clamp locks.
5. Connect the straps diagonally, each with a closure, and clamp using a clamping device.
6. Your goods are secured against tilting, slipping and failing

Industries Served

- Logistics
- Engineering and Machinery
- Power and Refinery



Product Specifications


Technical Specifications	
Material	
Sheet:	PP woven material 150 gsm
Belt:	Polyester woven belt 25 mm
Clamp Lock:	Treated metal

Technical Specifications	
Sizes	
Sheet:	2,30 X 2,30 meter with one fixed clamp lock one each corner
4 Belts:	3,50 meter long each with fixed strap in hook on one end
2 Buckles:	Phosphated wire buckle 25mm

Technical Specifications	
Strength	
Belts:	1000 daN each
Awning:	Clamp Locks average 60 KG each
Total:	Aproximately 4200 KG

Technical Specifications	
Packing	
Quantity / Box:	100 pieces
Box Size:	1240 x 1000 x 590 mm
Weight:	545 KG

Dimensions:

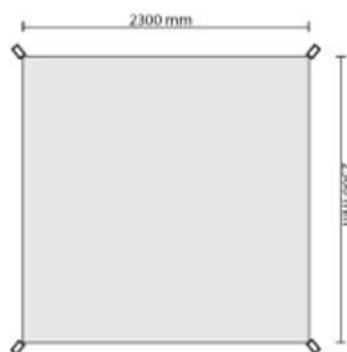

Related Products



Dunnage Bags



Standard Inflation Tool



Edge Protector



Reefer Lock



STREAM PEAK INTERNATIONAL PTE LTD
 Tel: +65 6610 7921 | Fax: +65 6862 2520
 Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods
 Address: 26 Tuas South Street 3, S(638026)
 Website: www.streampeak.com.sg