

AUTO BAG R1285 VELOCITY ORDER FULFILMENT AUTOMATIC BAGGER



Product Description

High-Speed Printing and Bagging

The fastest tabletop poly mailer packaging system available for mail order fulfilment packaging – Auto Bag R1285 Velocity Order Fulfilment automatic bagger is equipped with a 4” thermal transfer printer (203 dpi) which can easily satisfy various application demands and assimilate into any warehouse management system due to the comprehensive connectivity it offers. The R1285 also has a “next bag out” printing design which allows for the scanning of packing lists and printing of their respective shipping labels on the bags, making it ideal for efficient mail order fulfilment packaging using poly mailers.

High Performance in a Small Footprint

Specifically developed to cater plain printed pre-open bags on roll and max 12” wide coex poly mailers, the Auto Bag R1285 Velocity automatic bagger is a user-friendly machine that provides a variety of choices for the customization of the system to one’s poly mailer packaging process. Due to its need for compressed air, the R1285 offers the exact performance as a larger floor standing mail order fulfilment bagging system despite having a much smaller footprint, making it perfect for multi-shift use in industrialized businesses.

Extendable Warranty

A 5-year extension of the standard 1-year warranty will also be provided when exclusively using Auto Bag poly mailers and thermal transfer printer ribbon in your mail-order fulfilment bagging operation.

Industries Served

- Automotive
- Cosmetics
- Electronics
- Healthcare
- Logistics
- Shipping



STREAM PEAK INTERNATIONAL PTE LTD
Tel: +65 6610 7921 | Fax: +65 6862 2520
Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods
Address: 26 Tuas South Street 3, S(638026)
Website: www.streampeak.com.sg

Operating Benefits

- 7" colour touchscreen with clear readable prompts and alarms
- Electric foot switch, photo-eye (optional), or fully automatic cycle start
- Includes load shelf with bag support (up to 13" bag length)

Printing Benefits

- High-resolution reliable printing performance for 24/7 operation
- Large graphic display for quick navigation and printer notifications
- A broad range of connectivity for use with applications and networks

Maintenance Benefits

- Off the shelf modular components for easy replacement
- Self-diagnostics ensure quick problem solving
- Reliable components designed for multi-shift production

Set Up Benefits

- Utilizes Auto Bag pre-opened bags-on-a-roll for quick bag size changes and easy set-up
- PLC with 20 job storage, batch counters, packaging statistics & temperature control
- Built-in interface ports integrate counters, scales, and robotics

Safety Benefits

- Low-pressure seal bar closing with obstruction detection
- Dual palm buttons for added operator safety (optional)



Options

- **Air Expeller / Bag Deflator**

This option mounts to the pressure bar and compresses the air out of the bag as it travels inward toward the machine just prior to the sealing process..

- **Additional Parts Funnels**

Wide variety of standard and custom funnels to assist product handling

- **Articulating Bag Support**

A pneumatically operated shelf that is used to support the bottom and back of the bag during the loading process. The shelf then tips down and out of the way after the bag has been sealed.

- **Bag Spreader / Seal Flatteners**

Pneumatically operated opposing fingers that pull each side of the bag taught above the seal area to flatten the bag seal area; thus, decreasing the possibility of wrinkles in the seal area and increasing seal integrity.

- **Bag Support**

Fixed shelf to support bag during loading of heavy products

- **Dual Start Buttons(Anti-Tie Down)**

Two optical no touch” buttons must be passed through simultaneously to initiate the cycle operation of the bagger. If the two sensors are not passed through at the same time, the bagger will not cycle ensuring that fingers or hands cannot be in the seal area. Recommended for hand load applications where no funnel is used.

- **Ergonomic Start Switch**

A pass-through switch used in place of a foot pedal to cycle the machine

- **Conveyor / Feeder Ready Cabling**

The pre-wired cables that allow you to connect to the DC controls of in-feed devices

- **Kit/CountingConveyors**

Help with kit packaging and/or product counting operations

- **Tabletop Console Stand**

Mechanically adjustable stand for all the tabletop machines

- **220 Volt Option** Is available 220V, 50/60 Hz



Product Specifications


Technical Specifications	
Speed	Up to 60 bags/min (dry cycle, no print)
Bag Width	2" - 12"
Bag Length	4" - 20"
Bag Thickness	1mil - 5mil
Seal Width	1/8"
Printer	4" integrated thermal transfer @ 203 dpi
Electrical Requirement	120V, 7A, 50/60Hz
Air Requirement	80psi @ 2 - 5 CFM
Dimensions (W x D x H)	30" x 30" x 24"
Weight	85 lbs
Warranty	1 year, extendable to 5 years when exclusively using Auto Bag brand material
Origin	Made in the USA



STREAM PEAK INTERNATIONAL PTE LTD
Tel: +65 6610 7921 | Fax: +65 6862 2520
Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods
Address: 26 Tuas South Street 3, S(638026)
Website: www.streampeak.com.sg

Product Dimensions

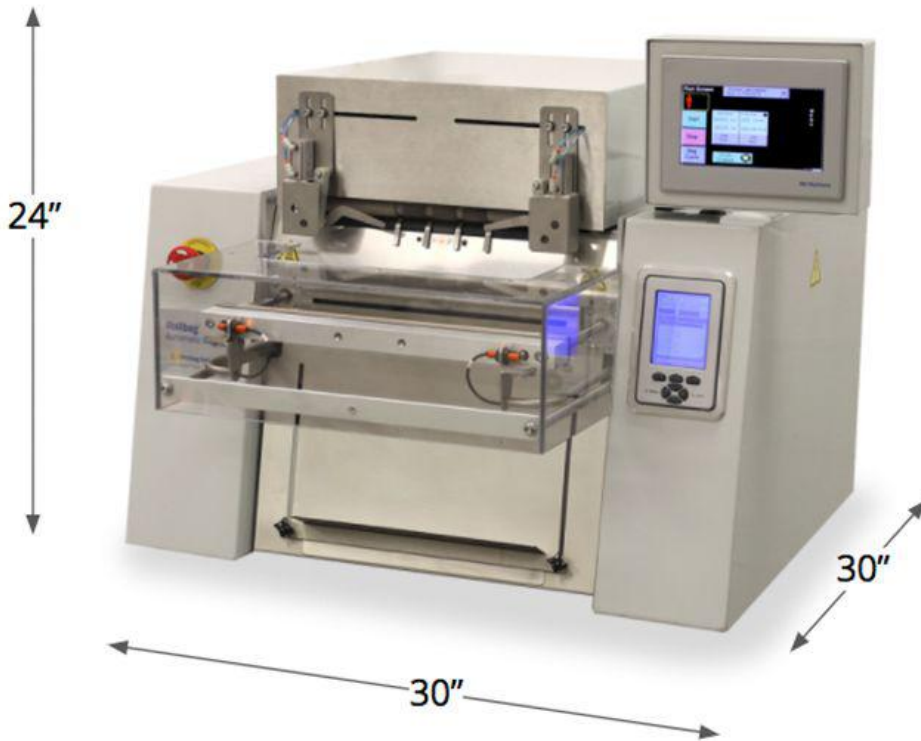

Related Products



Auto Bag R785
Automatic Bagger



Auto Bag R1075
Automatic Bagger



Auto Bag Magnum
Horizontal Automatic Bagger



Auto Bag R3200
Fulfillment Bagger



STREAM PEAK INTERNATIONAL PTE LTD
Tel: +65 6610 7921 | Fax: +65 6862 2520
Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods
Address: 26 Tuas South Street 3, S(638026)
Website: www.streampeak.com.sg